

ML8/ML8F/ML8AD

8×4 寸全频音箱 /8×4 寸 DANTE 柱形音箱

8×4"Full Range Speaker/8×4"Column Speaker with Dante

ML SERIES

专利号：ZL 2018304153857


应用范围 Application

- ▶ 会议室、礼堂、宴会厅、音乐厅、教堂、酒吧主扩声、中小型流动系统的主扩声、辅助扩声
- ▶ Conference room, Auditorium hall, Banquet Hall, Concert Hall, Church, FOH for Bars, FOH for medium and small touring system

产品特性 Features

- ▶ 采用高性能革新铝材质箱体设计，体积小巧，性能卓越，在保证轻盈的同时具有坚韧的品质，内置8×4"全频单元，提供平滑的频响曲线和广泛的覆盖角度，具有高语言清晰度和高保真音色。
- ▶ 紧凑型小箱体具备高声压级输出，高保真扩声性能，并且可以多只组成垂直阵列，拥有安装方便快捷的特性，专为固定安装和小型流动扩声系统提供高清晰度解决方案。
- ▶ 内嵌欧洲进口D类开关电源功放模块，提供600W强悍动力，以及Dante网络传输音频信号，采用一根5类网线与带Dante的音频矩阵、Dante转换盒及数字调音台的音频信号互联互通，通过软件完成音频网络信号的集中管理。
- ▶ Adopts high performance innovative aluminium enclosure design, small size, excellent performance, the quality is durable while lightweight, with built-in range speaker unit, provide smooth frequency response curve and broad dispersion, ensure the high speech intelligibility and high fidelity.
- ▶ Compact enclosure with high sound pressure output, make sure high fidelity sound performance, and can form multiple vertical array, easy and fast installation, designed for providing high definition solution for fixed installation and small touring system.
- ▶ Embedded with class D switch power amplifier module imported from Europe, it provides 600W powerful power and Dante network to transmit audio signal, A 5-type network cable is used to connect with the audio matrix with Dante, the Dante conversion box and the audio signal of the digital mixer, and the centralized management of the audio network signal is completed by software.

产品尺寸 Product dimension

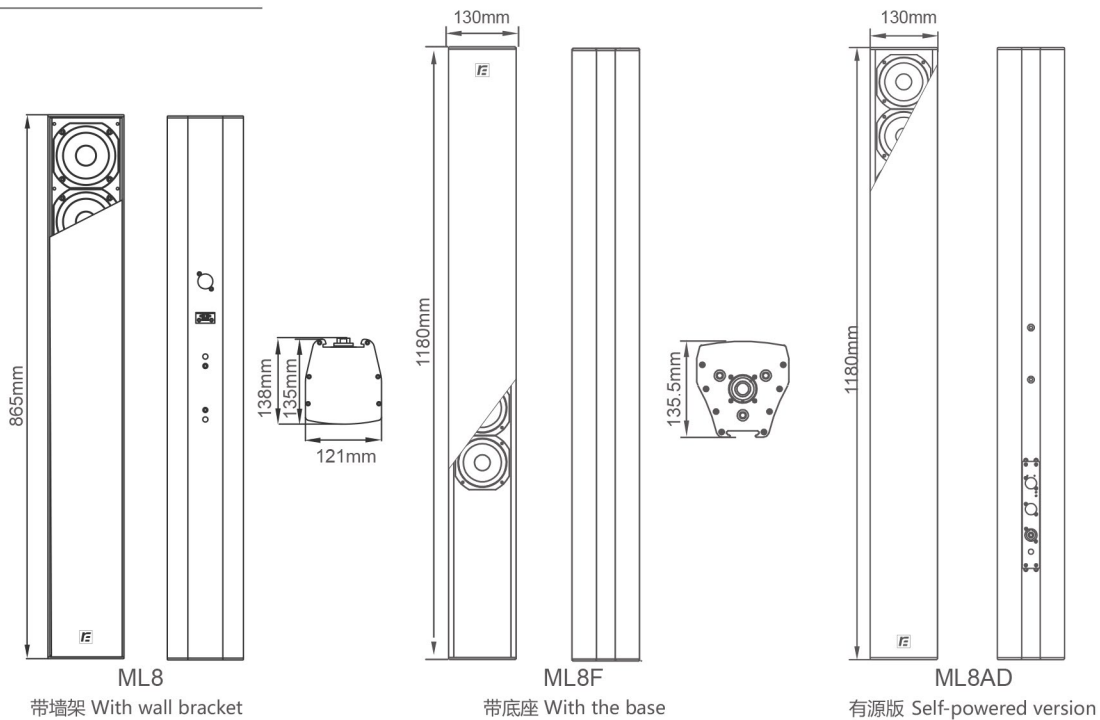

POWERED BY
Towersoft
AUDIO

Dante™



广州市锐丰智能科技有限公司 A: 广东省广州市番禺区市莲路石楼路段10号
T: 020-3928 0043 F: 020-39280123-8014 E: info@rfintell.com Z: 511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10, Shilou Section, Shilian Road, Panyu District, Guangzhou, Guangdong, China
T: +86 2039280083 Mobile: +86 13609092324 F: +86-20-39280123-8014 E: mail:sales@rfintell.com Z: 511447 www.rfintell.com


参数规格 Specifications

► ML8/ML8F

系统类型	8×4寸全频音箱	System	8×4" full range speaker
灵敏度(1W/1m)	99dB	Sensitivity(1W/1m)	99dB
频率响应	120Hz~17kHz(-10dB)	Frequency response	120Hz~17kHz(-10dB)
额定功率(AES)	320W	Power rating	320W
最大声压级 (连续/峰值)	124dB/130dB	SPL (Continuous /Peak)	124dB/130dB
标称覆盖角(H×V)	80°×25°	Dispersion(H×V)	80°×25°
标称阻抗	4Ω	Normal impedance	4Ω
标称阻抗	8×4"低音单元(1"音圈)	LF driver	8×4" LF unit(1" Voice Coil)
喇叭单元	1×四芯音箱插座1+ 1-,1×2PIN凤凰插座, 1+2-(ML8)	Connectors	1×4 core socket 1×2 PIN phoenix socket ,1+2-(ML8)
连接件	2×NEUTRIK NL4MP四芯插座, 1+ 1-(ML8F)		2×NEUTRIK NL4MP 4 pin plug , 1+ 1-(ML8F)
吊挂硬件	ML8 : 2×M8 吊点 865×121×138mm(ML8配墙架版)	Fittings	ML8 : 2×M8 rigging point
尺寸(H×W×D)	1180×130×135.5mm(ML8F配超低版)	Dimension(H×W×D)	867×121×138mm(ML8 with wall frame) 1180×130×135.5mm(ML8F match with subwoofer)
重量	11kg(ML8)/12kg(ML8F)	Weight	11kg(ML8)/12kg(ML8F)

► ML8AD

系统类型	8×4寸DANTE柱形音箱	System	8×4" Column Speaker with Dante
灵敏度(1W/1m)	99dB	Sensitivity(1W/1m)	99dB
频率响应	120Hz~17kHz(-10dB)	Frequency response	120Hz~17kHz(-10dB)
额定功率(AES)	320W(驱动功率600W)	Power rating	320W(driving power 600W)
最大声压级(连续/峰值)	124dB/130dB	SPL(Continuous /Peak)	124dB/130dB
标称覆盖角(H×V)	80°×25°	Dispersion(H×V)	80°×25°
标称阻抗	4Ω	Normal impedance	4Ω
喇叭单元	8×4"低音单元(1"音圈)	LF driver	8×4" LF unit(1" Voice Coil)
连接件	音频输入RJ45网络口、输出卡侬头 (通道2)	Connectors	Audio input RJ45 connector,output XLR connector(Channel 2)
吊挂硬件	2×M8 吊点	Fittings	2×M8 rigging point
尺寸(H×W×D)	1180×130×135.5mm	Dimension(H×W×D)	1180×130×135.5mm

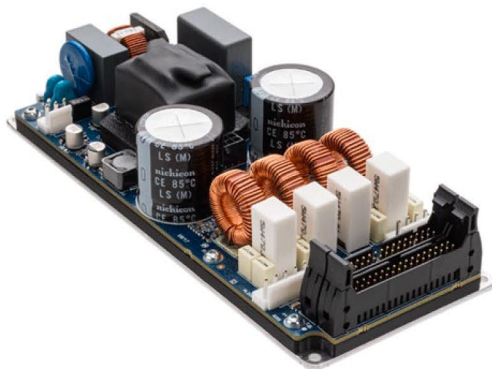

POWERSOFT 模块

