

TX6 / TX8 / TX10 / TX12

单6 / 8 / 10 / 12寸二分频全频音箱

Single 6" / 8" / 10" / 12" Two-Way Full-Range Loudspeaker

TX SERIES

应用范围 Application

- ▶ 多功能厅、宴会厅、商务会议、酒吧、辅助、舞台返送、侧返送、台唇补声
- ▶ Multi-function Hall, Banquet Hall, Meeting room, Rock Bar, Stage Monitor, Side monitor.


产品特性 Features

▶ TX系列音箱是一款全新设计的高清晰度多功能音箱，同时推出了五个规格全频音箱，包含6寸、8寸、10寸、12寸、15寸全频，赋予了扩声系统更多选择，以满足“多场合、多用途”的应用特点。它具备能将声音细节高度还原，声音听感厚实贴脸，可作为主扩或辅助使用（根据现场使用需求号角旋转90度），也可作为舞台返听（可选近场或远场覆盖角度摆放）；同时，箱体各面都设计有隐藏吊点，6至15寸箱体配备支撑底托，可满足吊挂、壁挂、支撑使用；桦木复合板制作，聚脲喷涂工艺，让箱体更结实耐磨和防撞。


▶ TX series speakers are a newly designed high-definition multifunctional speakers, and has 6-inch, 8-inch, 10-inch, 12-inch, 15-inch for selection, offer more options to meet "multi-occasion, multi-purpose". It has the ability to highly restore sound details, the sound hearing feeling is thick and close to the face, can be used as the main expansion or auxiliary use (90 degrees rotation according to the demand of the field), but also can be used as the stage monitor (optional near field or far field coverage angle); at the same time, each side of the box is designed with hidden hanging points, and the 6 to 15 inch box is equipped with support base support to meet the hanging, wall hanging and supporting; Manufacture of birch-wood, polyurea coating, makes the box stronger, wear-resistant and anti-collision.




产品尺寸 Product dimension

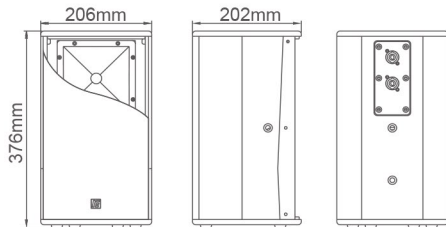


TX6

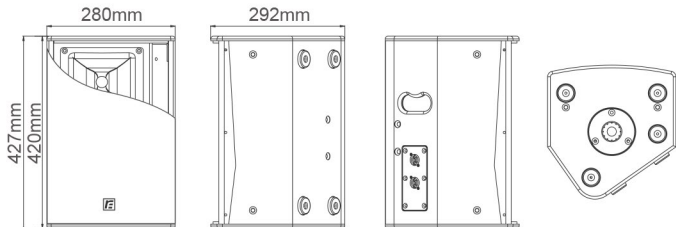


TX8

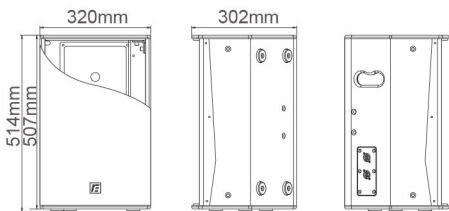

TX10

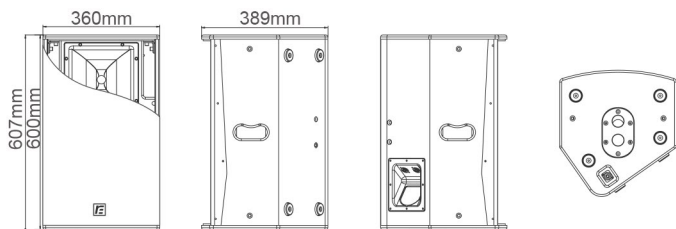

TX12



广州市锐丰智能科技有限公司 A: 广东省广州市番禺区市莲路石楼路段10号
T: 020-3928 0043 F: 020-39280123-8014 E: info@rfintell.com Z: 511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10, Shilou Section, Shilian Road, Panyu District, Guangzhou, Guangdong, China
T: +86 2039280083 Mobile: +86 13609092324 F: +86-20-39280123-8014 E: mail:sales@rfintell.com Z: 511447 www.rfintell.com

参数规格 Specifications 

型号	TX6	TX8	TX10	TX12
系统类型	单6寸二分频全频音箱	单8寸二分频全频音箱	单10寸二分频全频音箱	单12寸二分频全频音箱
灵敏度(1W/1m)	92dB	95dB	96dB	98dB
频率响应	85Hz~18kHz(±3dB)	75Hz~18kHz(±3dB)	65Hz~18kHz(±3dB)	60Hz~18kHz(±3dB)
	80Hz~20kHz(-10dB)	65Hz~20kHz(-10dB)	55Hz~20kHz(-10dB)	50Hz~20kHz(-10dB)
额定功率(AES)	250W	300W	350W	450W
最大声压级(连续/峰值)	116dB/122dB	119dB/125dB	121dB/127dB	124dB/130dB
标称覆盖角(H×V)	90°×60°(可旋转,玻璃钢号筒)	90°×60°(可旋转,玻璃钢号筒)	90°×40°(可旋转,玻璃钢号筒)	80°×50°(可旋转,玻璃钢号筒)
标称阻抗	8Ω	8Ω	8Ω	8Ω
低音单元	6寸50芯铝盆铁磁单元	8寸50芯铝盆铁磁单元	10寸65芯铝盆铁磁单元	12寸75芯铝盆铁磁单元
高音单元	1.75寸(1寸喉口)压缩驱动器(44mm音圈)			
连接件	2×NEUTRIK NL4MP四芯插座, 1+1-		3×NEUTRIK NL4MP四芯插座, 1+1-	
悬挂硬件	M8吊点×5、35mm底托	M8吊点×14、35mm底托	M8吊点×14、35mm底托	M8吊点×14、35mm双孔底托
尺寸(H×W×D)	376×206×202mm	427×280×292mm	514×320×302mm	607×360×389mm
重量	8.3kg	13kg	16kg	24kg

ITEM NO.	TX6	TX8	TX10	TX12
System type	Single 6"Two-Way	Single 8"Two-Way	Single 10"Two-Way	Single 12"Two-Way
	Full-Range Loudspeaker	Full-Range Loudspeaker	Full-Range Loudspeaker	Full-Range Loudspeaker
Sensitivity(1W/1m)	92dB	95dB	96dB	98dB
Frequency response	85Hz~18kHz(±3dB)	75Hz~18kHz(±3dB)	65Hz~18kHz(±3dB)	60Hz~18kHz(±3dB)
	80Hz~20kHz(-10dB)	65Hz~20kHz(-10dB)	55Hz~20kHz(-10dB)	50Hz~20kHz(-10dB)
Power rating(AES)	250W	300W	350W	450W
SPL(continue/peak)	116dB/122dB	119dB/125dB	121dB/127dB	124dB/130dB
Dispersion(H×V)	90°×60°	90°×60°	90°×40°	80°×50°
	(Rotatable fiberglass horn)	(Rotatable fiberglass horn)	(Rotatable fiberglass horn)	(Rotatable fiberglass horn)
Nominal Impedance	8Ω	8Ω	8Ω	8Ω
LF	6"50core, Aluminium Basket Ferriet Magnet with aluminum basket	8"50 core, Aluminium Basket Ferriet Magnet with aluminum basket	10"65 core, Aluminium Basket Ferriet Magnet with aluminum basket	12"75 core, Aluminium Basket Ferriet Magnet with aluminum basket
HF	1.75"(1"throat)compression driver(44mm voice coil)			
Connectors	2×NEUTRIK NL4MP 4 pin socket, 1+ 1-		3×NEUTRIK NL4MP 4 pin socket, 1+ 1-	
Fittings	5×M8 flying point, 35mm pole-mount socket	14×M8 flying point, 35mm pole-mount socket	14×M8 flying point, 35mm pole-mount socket	14×M8 flying point, 35mm double pole-mount socket
Dimension(H×W×D)	376×206×202mm	427×280×292mm	514×320×302mm	607×360×389mm
Weight	8.3kg	13kg	16kg	24kg

