


Butterfly 4ca



IP55



With low impedance output and 70/100V outputs



Dimensions(W×H×D):215×122×165mm

Specifications

Frequency Response(-6dB)	100Hz-22kHz
Low Z Power	60W
High Z Power	70V:2.5W/5W/10W/20W 100V:5W/10W/20W/x
Maximum Calculated SPL/1M(Continuous/Peak)	111dB/117dB
Horizontal Coverage	100°
Vertical Coverage	20°
LF	4" driver
HF	2x1" driver
Crossover Mode	Passive Crossover
Impedance	16Ω
Input Connectors	All-weather protective connector
Cabinet Material	ABS plastic material
Protection grade	IP55
Angle adjustment	0°, 4°
Pole Mount	M10
Optional Accessories	Hanging Bracket,Wall Mount Bracket,Support Bracket
Cabinet Color	Metal gray
Mesh Color	Metal gray is standard and default color. Contact Audiocenter for customization
Dimensions(W×H×D)	215×122×165mm
Net Weight	2.5kg
Technical Support and After-sales Service	Global application support team, EASE GLL Files

Product Overview

Butterfly 4ca consists of 1 pc 4" LF driver and 2 pcs soft dome tweeters. The HF adopts a unique T-eye™ design, and the array layout is assembled in the center front of the speaker. The speaker has a wider frequency response and larger near-field coverage, and the sound is more delicate.

Butterfly 4ca adopts a modular design concept, which can be used individually or in combination with multiple speakers. It has good scalability and can flexibly adapt to various environments and occasions.

With all -weather pins, Butterfly is IP55 rated and meets the needs of different scenarios

Butterfly is with both high Z (70V/100V) and low Z (16Ω) output.
70V: 2.5W/5W/10W/20W
100V:5W/10W/20W/x

System Configuration

- Artist T2.4V/T4.4V Amplifier
- BrainCore CU

Back Panel



⊙ **IP55 Rated**

ABS plastic cabinet with all-weather pins is IP55 rated and meets the needs of different scenarios.




⊙ **High Z and Low Z**

High impedance (70V/100V) and low impedance (16 Ohm) available

70V :2.5W/5W/10W/20W

100V:5W/10W/20W/x

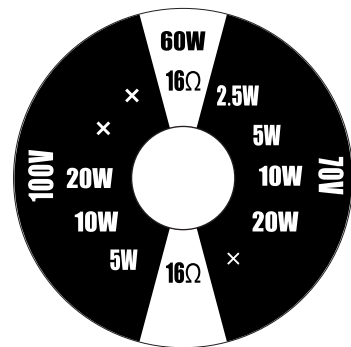

Accessories



Wall Mount / Monitor Bracket (Standard accessory packed with the speaker)

Dimension (WxHxD):
117x55x141mm



Single Wall Mount

Monitor



Hanging Frame

Dimension (WxHxD):
205x30.5x164.5mm



Hanging



Wall Mounted Bracket

Dimension (WxHxD):
205x100x339mm




Multiple pcs Wall Mount




Pole Mount Bracket


Dimension (WxHxD):
205x92.5x164.5mm

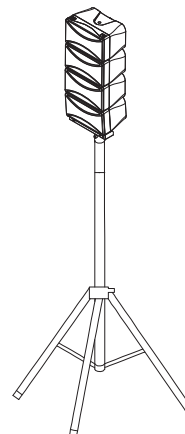

Tripod Pole Mount

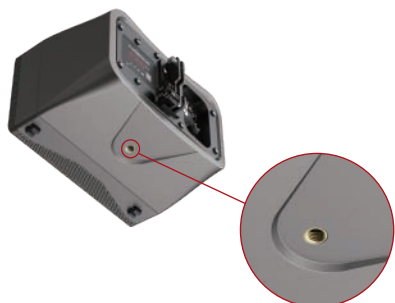

Cabinet built-in M10 bracket hole



Mount with Microphone Stand