

# L163-CI

4×6.5寸同轴三分频二驱动线性音柱

4×6.5" coaxial three-way bi-amp line column speaker

L SERIES

## 应用范围 Application


- ▶会议室、多功能厅的主扩声、会议厅、剧场的辅助扩声、娱乐包房的中置或补声音箱、餐厅、商场等室内场地、小型流动演出扩声
- ▶Main sound for Conference room, Multi-function hall, supporting fills for theater,entertainment room, restaurant room, shopping mall, small touring live show.

## 产品特性 Features

- ▶L163-CI是一款创新理念设计的同轴三分频二驱动线性音柱，由16个1寸高音单元、8个3寸中音单元和4个6.5寸低音单元组成；巧妙的把高音单元、中音单元及低频单元以线性同轴排列方式固定在一个非常紧凑小巧的箱体内，喇叭单元排列符合线声源阵列设计原理，实现精准的实时波束覆盖和高动态范围声压级，又能满足点声源的准确定位效果，并提供高品质音色和极高的清晰度。箱体两侧配置了半圆型设计堆叠连接侧板，给多只L163-CI组合安装提供了高度灵活性和便捷性，满足不同扩声系统设计特点需求和提供理想的解决方案。
- ▶L163-CI is a coaxial three-way bi-amp line column speaker with innovation design.It applies with 16x1" HF,8x3" MF and 4x6.5" LF. The special design and arrangement of the driver speakers accords with sound line source array theory. Flexible installation for different occasions.



## 产品尺寸 Product dimension

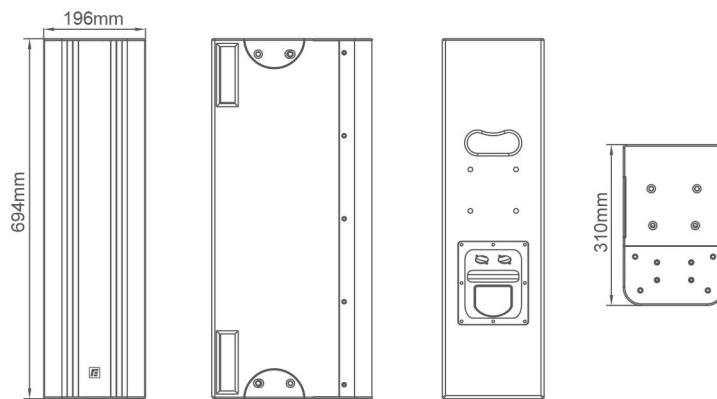

## 参数规格 Specifications

<b>系统类型</b>	4×6.5寸 ( 28个喇叭单元) 同轴线阵音柱音箱	<b>System type</b>	4×6.5" ( 28 speaker drivers)coaxial line column speaker
<b>灵敏度(1W/1m)</b>	MHF : 105dB/LF : 99dB	<b>Sensitivity(1W/1m)</b>	MHF : 105dB/LF : 99dB
<b>频率响应</b>	90Hz~19kHz(±3dB) /80Hz~20kHz ( -10dB )	<b>Frequency response</b>	90Hz~19kHz(±3dB) /80Hz~20kHz ( -10dB )
<b>标称阻抗</b>	MHF : 8Ω/LF : 8Ω	<b>Nominal impedance</b>	MHF : 8Ω/LF : 8Ω
<b>额定功率( AES )</b>	MHF : 350W/LF : 550W	<b>Power rating (AES)</b>	MHF : 350W/LF : 550W
<b>高音单元</b>	16×1寸钕磁丝膜高音	<b>HF</b>	16×1" Neodymium HF driver
<b>中音单元</b>	8×3寸钕磁中音	<b>MF</b>	8×3" Neodymium MF driver
<b>低音单元</b>	4×6.5寸钕磁低音	<b>LF</b>	4×6.5" Neodymium LF driver
<b>覆盖角度(HxV)</b>	110°×10°	<b>Dispersion(H × V)</b>	110°×10°
<b>最大声压级(连续/峰值)</b>	MHF:130dB/136dB, LF:126dB/132dB	<b>SPL(continue/peak)</b>	MHF:130dB/136dB, LF:126dB/132dB
<b>连接件</b>	2×NEUTRIK NL4MP四芯插座, LF : 1+1-,MHF : 2+2-	<b>Connectors</b>	2×NEUTRIK NL4MP 4 pin socket , LF : 1+1-,MHF : 2+2-
<b>吊挂硬件</b>	M8吊点×20,连接侧板×4	<b>Fittings</b>	M8×20, side plate ×4
<b>尺寸(H×W×D)</b>	694×196×310mm	<b>Dimension(H×W×D)</b>	694×196×310mm
<b>重量</b>	20kg	<b>Weight</b>	20kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号  
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10,Shilou Section,Shilian Road,Panyu District,Guangzhou,Guangdong,China  
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com